





Long and short clip terminal

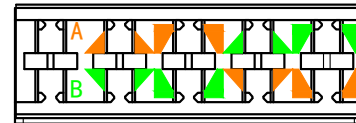

A

 $\backslash 2:1$ 

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO $+85^{\circ}$
2. OPERATION: 0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
6. RJ45 JACK ;LIFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN
8. WIRE:AWG 22-26

											
					Material					Item No.	17620
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	STP Cat.5e Keystone Jack
Drawn	Ding jian bo	2015.12.29	Tolerance			A4	X:1	mm	ERP	Part No.	
Checked	Ge pei jun	2015.12.29	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20								
Approved	Wang wei jun	2015.12.29	100.00- Angle ±0.25 ±30°								
					Sheet	1 OF 1	Version: A/0				