



## Model Number: 71500C 1/4x2 8K@60Hz HDMI Splitter

### Description:

This product is an 8K HDMI splitter that splits one HDMI input signal to two HDMI output signals.

Adopting the latest standard HDMI2.1, the video signal transmission is as high as 8K@60Hz/


4K@120Hz/1080p@240Hz. With HDR10+,

Dolby Vision high dynamic range image and variable refresh rate (VRR), the screen display is more delicate and smooth, which can be widely used in TV stores, cinemas, outdoor advertising and home entertainment. etc.



### לצפייה באתר לחץ כאן

### Wire:

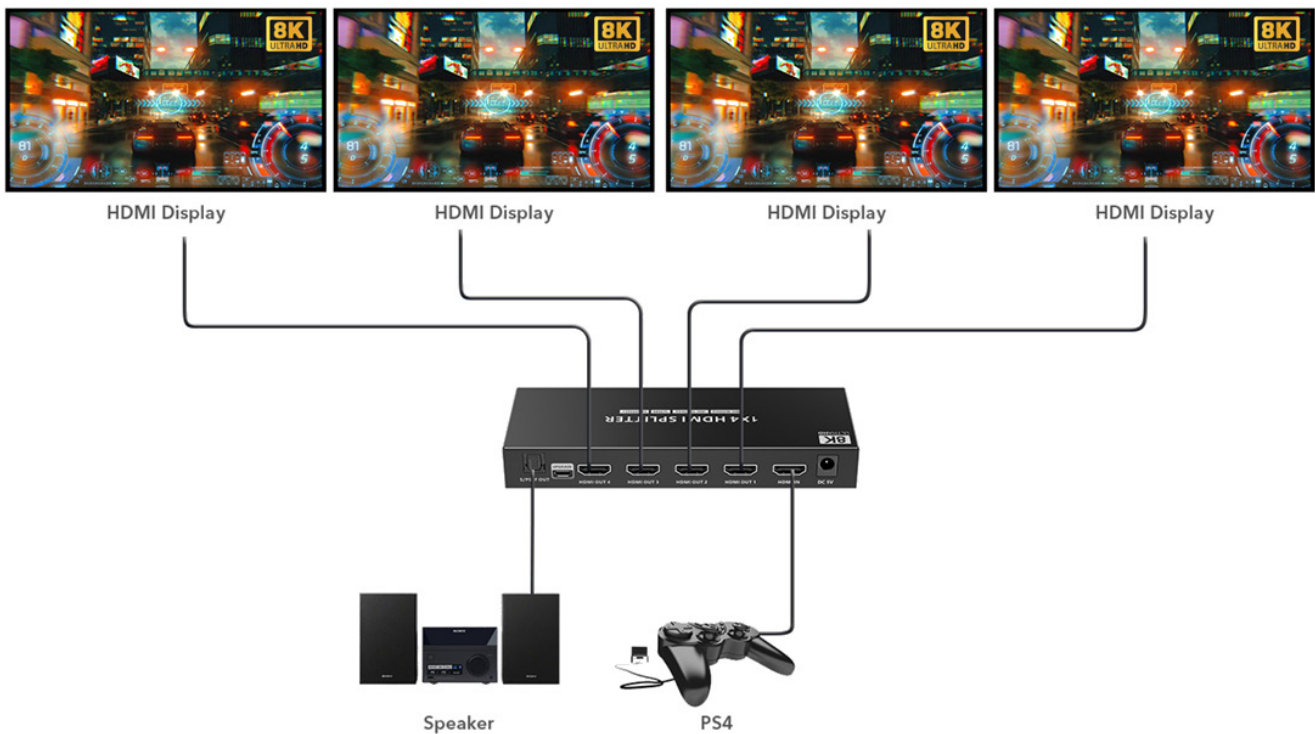



## Specifications:

Item		1/4x2 8K@60Hz HDMI Splitte	
Model		18346	18347
Video signal	HDMI Input	1x HDMI	
	HDMI Output	2x HDMI	4x HDMI
	Compatibility	HDMI 2.1, HDMI2.0, HDMI1.4	
	Maximum transmission rate	HDCP 2.3, HDCP2.2, HDCP1.4	
	Resolutions	7680x4320@24/25/30/50/60Hz 3840x2160@24/25/30/50/60/120Hz 1080p@24/25/30/50/60/120/240Hz 720p@50/60/100/120Hz	
	EDID passthrough, auto downscaling		
	HDR10/HDR10+/Dolby Vision		
	HDMI 3D		
	HDMI CEC		
	VRR, Free Sync, G-Sync		
Audio signal	"S/PDIF Output/HDMI Output"	Dolby Atmos, Dolby Digital 7.1CH, Dolby True HD · DTS:X, DTS-HD, LPCM 7.1CH	
Power	Power Supply	DC5V/1A	DC5V/2A
	"Power Consumption"	< 4W	< 6W
Operating Environment	"Working temperature"	-20°C~60°C	
	"Storage temperature"	-30°C~70°C	
	Humidity	0~90%RH ( No condensation )	
Physical Properties	Housing	Iron	
	Weight	199g	251g
	Color	Black	
	Dimensions mm	135.0(L)*54.0(W)*16.5(H)	160.0(L)*58.0(W)*16.5(H)
Protection	ESD protection   1a Contact discharge level 2 (±4KV)   1b Air discharge level 3 (±8KV)   Implementation of the standard: IEC61000-4-2		
	Lightning protection, Surge protection		